



Thick Film Chip Resistor Arrays
 (Lead-Free for CNC34 Concave Type)
 Halogen-Free


Document No	TCNC-340S003G
Revised Date	2016/11/30
page number	1 / 8

1. Scope :


This specification applies for the CNC34 Concave Type of thick film chip resistor arrays made by TA-I.

2. Construction , Dimensions , Schematic :

2.1 Construction :

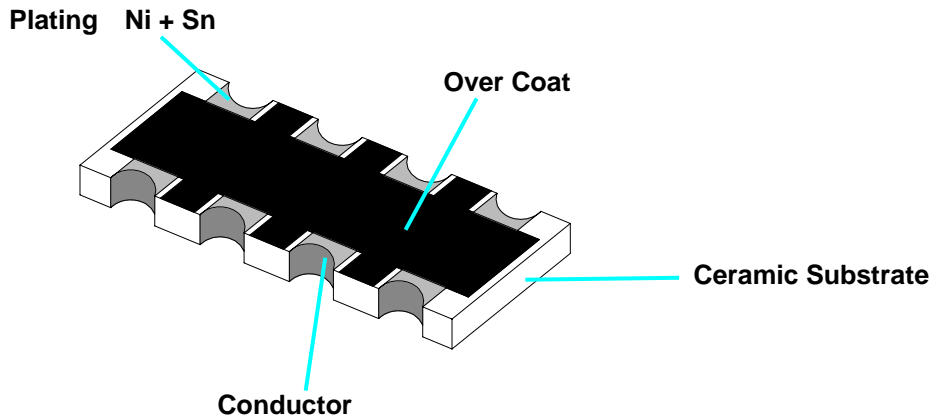

2.1.1 Chip Resistor Arrays :

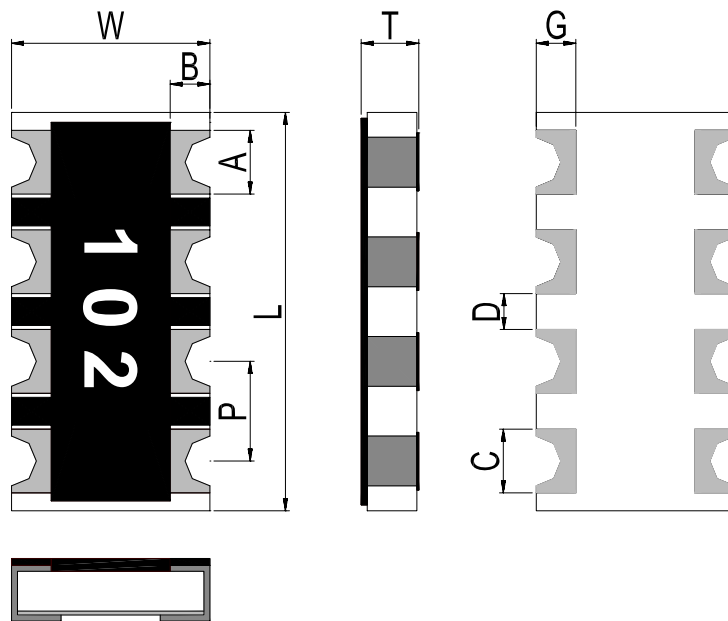

2.2 Dimension :

UNIT:mm


Type	L	W	T	P	A	B	C	D	G
CNC34	3.2±0.2	1.5±0.2	0.55±0.1	0.8±0.1	0.6±0.1	0.3±0.2	0.5±0.1	0.25±0.1	0.35±0.15



Thick Film Chip Resistor Arrays
 (Lead-Free for CNC34 Concave Type)
 Halogen-Free

Document No	TCNC-340S003G
Revised Date	2016/11/30
page number	2 / 8

2.3 Schematic :

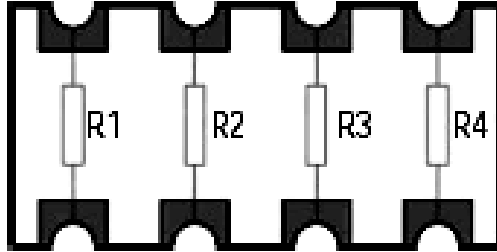

$R1=R2=R3=R4$

3. Type Designation:

3.1 Chip Resistor Arrays

CNC 34 J T N 102

Product Code **size** **Tolerance** **Packaging** **Nominal Resistance**
 CNC: Chip Resistor Arrays Power Rating
 Concave type

34 – 0603 *4

J-±5%
F-±1%

T- Paper Tape
N- Lead Free

3. digits e.g.,:
(E-24) 102 = 1KΩ
4 digits E.G. :
(E-96) 1540 = 154Ω

4. Ratings & Characteristics :

Type	Power Rating at 70°C	Rating Voltage	Max .Working Voltage	Max. Over Load Voltage	Operating Temp.(°C)	Resistance Tolerance(%)	Resistance Range (Ω)	Temp Coefficient PPM/°C
CNC34	1/16W	Refer 4.2	50V	100V	-55 +125°C	±5% ±1%	10Ω~1MΩ	±200

0Ω THICK FILE CHIP RESISTOR ARRAYS			
Type	Rated Current	Max Overload Current	Resistance Range
CNC 34	1A	2.5 A	50mΩ MAX



Thick Film Chip Resistor Arrays
 (Lead-Free for CNC34 Concave Type)
 Halogen-Free

Document No	TCNC-340S003G
Revised Date	2016/11/30
page number	3 / 8

4.1 Derating Curve :

For resistors operated at ambient temperature over 70°C , power rating shall be derated in accordance with figure 1.

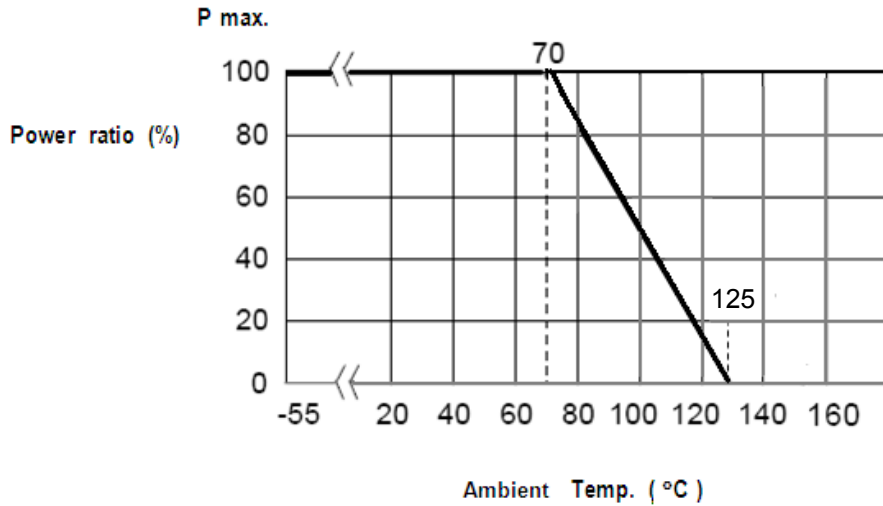


Figure 1

4.2 Rated Voltage :

The rated voltage is calculated by the following formula:

$$E = \sqrt{P * R}$$

E=Rated Voltage(V)
 P=Rated Power(W)
 R=Resistance Value(Ω)

E.G. : What is CNC34JTN102 the rated voltage ?

CNC34JTN102 P:1/16W ; R:102 = 1KΩ = 1000Ω

$$E = \sqrt{0.0625(W) * 1000(\Omega)} = 7.9 (V)$$



Thick Film Chip Resistor Arrays
 (Lead-Free for CNC34 Concave Type)
 Halogen-Free

Document No	TCNC-340S003G
Revised Date	2016/11/30
page number	4 / 8

5. Reliability Tests :

Test Items	Reference standard	Condition of Test	Test Limits (ΔR/R)
Temperature Coefficient of Resistance	IEC60115-1-4.8 JIS-C5201-1-4.8	-55~ +125 °C	Refer 4.0
Short Time Overload	IEC60115-1-4.13 JIS-C5201-1-4.13	2.5 X rated voltage for 5 sec	± (2.0 % + 0.1Ω) 0Ω : 50mΩ or less
Intermittent Overload	IEC60115-1-4.39 JIS-C5201-1-4.39	2.5X rated voltage or Max Overloading Voltage , 1sec "ON" 25 sec "OFF" , 10000 cycles	± (5.0% + 0.1Ω) 0Ω : 50mΩ or less
Load Life	IEC60115-1-4.25.1 JIS-C5201-1-4.25.1	1000 hours at rated voltage , 70°C , 1.5hours "ON " , 0.5hour "OFF"	1%:±(1.0%+0.05Ω) 5%:±(3.0%+0.1Ω) 0Ω : 100mΩ or less
Load Life with Humidity	IEC60115-1-4.24 JIS-C5201-1-4.24	1000 hours at rated voltage , 40±2°C , 90~95% RH 1.5hours "ON " , 0.5hour "OFF"	1%:±(1.0%+0.05Ω) 5%:±(3.0%+0.1Ω) 0Ω : 100mΩ or less
Rapid Change of Temperature	IEC60115-1-4.19 JIS-C5201-1-4.19	-55°C (30 min.) / +125 °C (30 min.) 5 cycles	1%:±(0.5%+0.05Ω) 5%:±(1.0%+0.05Ω) 0Ω : 50mΩ or less
Solderability	IEC60115-1-4.17 JIS-C5201-1-4.17	245±5°C solder, 2±0.5 sec dwell. Solder : Sn96.5 / Ag3.0 / Cu0.5	At least 95% of surface area of electrode shall be covered with new solder.
Core body	IEC60115-1-4.15 JIS-C5201-1-4.15	Pressure 1.0 kgf a R0.5 pressure rod for 10 sec	Without mechanical damage such as breaks. Electrical characteristics shall be satisfied
Dielectric Withstanding Voltage (Voltage Proof)	IEC60115-1-4.7 JIS-C5201-1-4.7	Applying voltage 100V for 1 minute.	No abnormalities such as flashover, burning dielectric breakdown shall appear.
Resistance to Solder Heat	IEC60115-1-4.18 JIS-C5201-1-4.18	270 ±5°C solder ,10 ±1 sec dwell .	1%:±(1.0%+0.05Ω) 5%:±(2.0% + 0.1Ω) 0Ω : 50mΩ or less

Note* : RCWV : Rated continuous working voltage .



Thick Film Chip Resistor Arrays
 (Lead-Free for CNC34 Concave Type)
 Halogen-Free

Document No	TCNC-340S003G
Revised Date	2016/11/30
page number	5 / 8

6. Marking :

6.1 ±5%(E24) :

Resistance value is expressed by 3 digits, the first two digits represent the significant figures of nominal resistance value in Ω , and the third digit represents exponent for base of 10.

E.G. $472 = 47 \times 10^2 = 4700 \Omega = 4.7K \Omega$

6.2 ±1% (E96) :


Resistance value is expressed by 4 digits, the first three digits represent the significant figures of nominal resistance value in Ω , and the fourth digit represents exponent for base of 10.

E.G. $4701 = 470 \times 10^1 = 4700 \Omega = 4.7k \Omega$

7. Taping & Reel :

7.1 Taping Dimensions

7.1.1 4 mm pitch paper

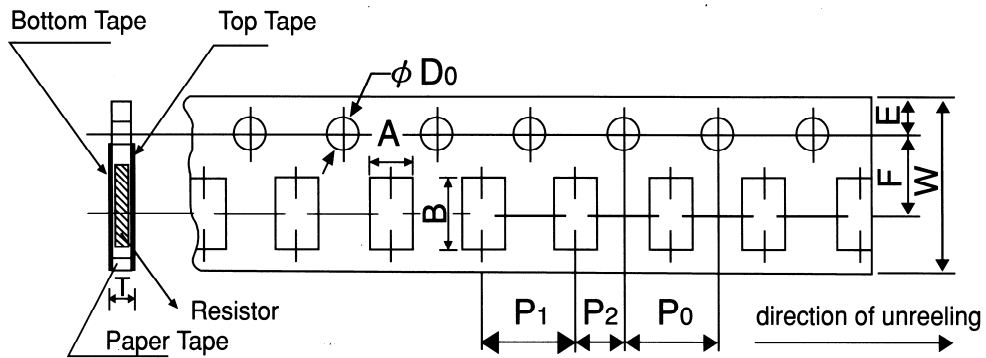

UNIT: mm

Type	A	B	W	F	E	P1	P2	P0	$\phi D0$	T0
CNC34	2.0±0.15	3.6±0.2	8.0±0.2	3.5±0.05	1.75±0.1	4.0±0.1	2.0±0.05	4.0±0.1	1.5 ^{+0.1} ₋₀	0.84±0.1




Thick Film Chip Resistor Arrays
 (Lead-Free for CNC34 Concave Type)
 Halogen-Free

Document No	TCNC-340S003G
Revised Date	2016/11/30
page number	6 / 8

Package Type	Paper Tape
	4 mm pitch
	178mm/R
CNC34	5000

7.2 Reel Specifications

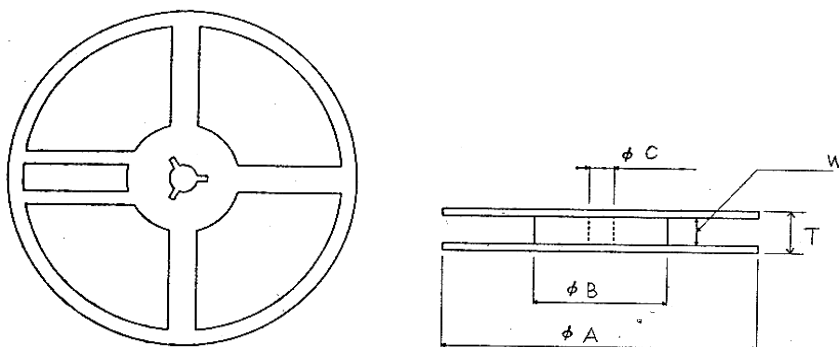


UNIT: mm

Type	ϕA	ϕB	ϕC	W	T
CNC34	178.0 ± 2.0	60.0 ± 1.0	13.0 ± 1.0	9.0 ± 1.0	11.5 ± 1.0

7.3 Peel off Strength:

Peel –off force of paper and blister tape is in accordance with “JIS-C5202” that is , 0.1 to 0.7 N at a peel-off speed of 300 mm / minute.

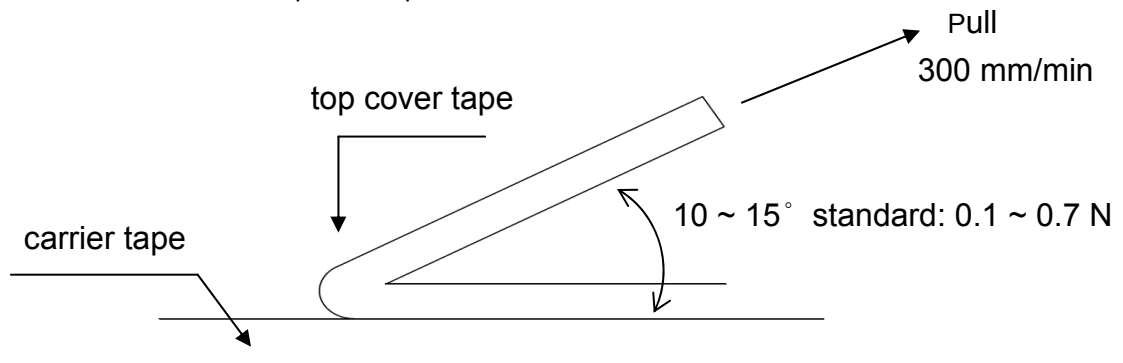




Thick Film Chip Resistor Arrays
 (Lead-Free for CNC34 Concave Type)
 Halogen-Free

Document No	TCNC-340S003G
Revised Date	2016/11/30
page number	7 / 8

8. Label :


8.1 Manufacture Label :

8.1.1 Chip Resistor Array

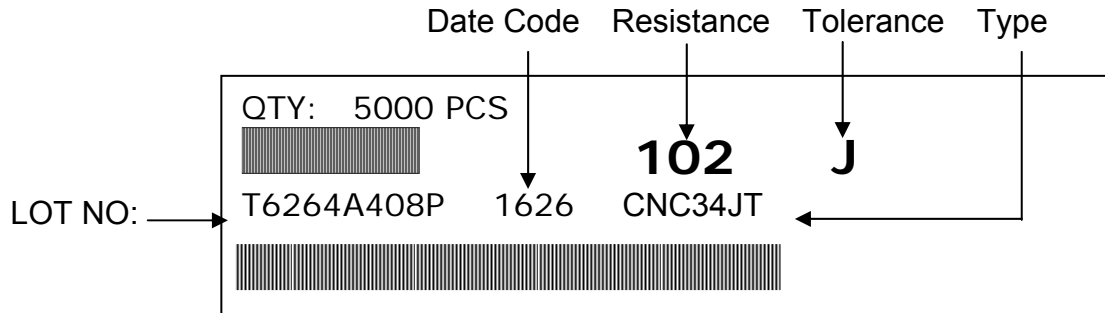


8.2. Customer Label (By customer request):

8.2.1 Chip Resistor Array

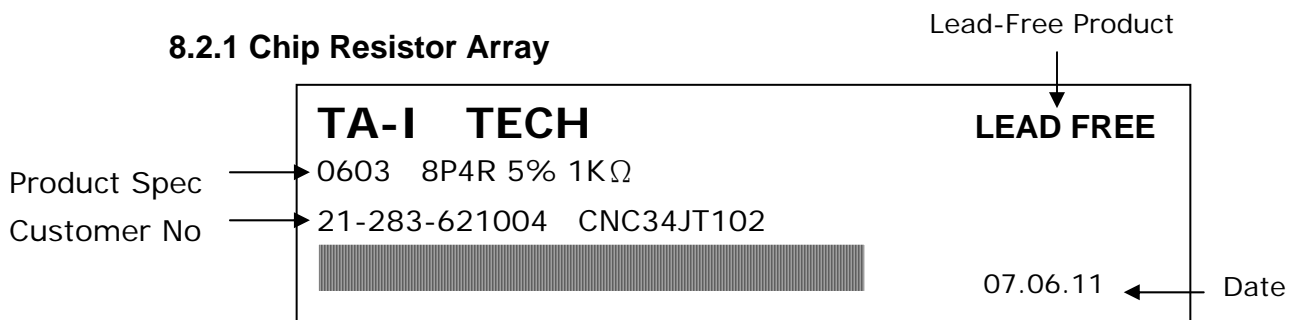

9. Recommended land patterns

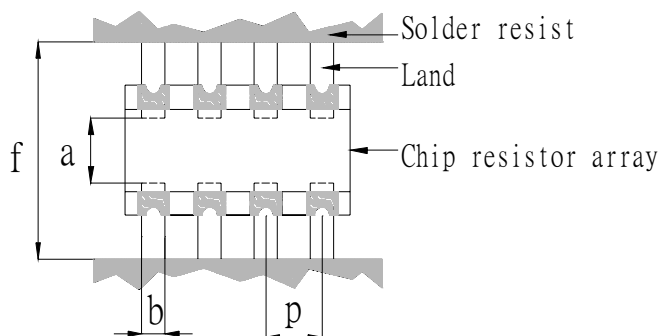


Land pattern		Dimension (mm)			
		a	b	p	f
Type	Size				
CNC	34	0.7~0.9	0.40~0.45	0.8	2.2~2.6



Thick Film Chip Resistor Arrays
(Lead-Free for CNC34 Concave Type)
Halogen-Free

Document No	TCNC-340S003G
Revised Date	2016/11/30
page number	8 / 8

10. Recommend IR – Reflow profile : (solder : Sn96.5 / Ag3 / Cu0.5)

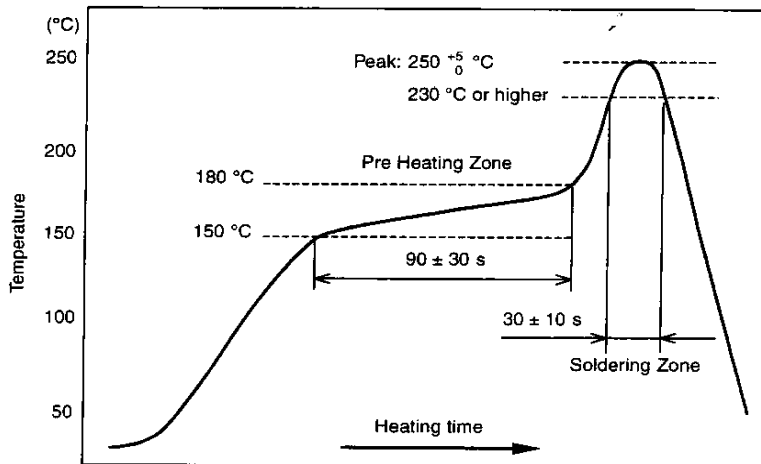

Peak : $250 \begin{matrix} +5 \\ -0 \end{matrix} \text{ } ^\circ\text{C}$, 5 sec

Pre – heat Zone : 150 to 180 °C, 90 ± 30 sec

Soldering Zone : 230°C or higher , 30 ± 10 sec

11. Storage Conditions:

Temperature : 5 to 35 °C

Related Humidity :40 to 75% RH

12. Shelf Life :

2 Years from manufacturing date.

13. ECN :

Engineering Change Notice: The customer will be informed with ECN if there is significant modification on the characteristics and materials described in Approval Sheet.

14. Manufacturing Country & City :

TA-I TECHNOLOGY CO., LTD. (Taiwan – Tao Yuan)

Tel: 886-3-3246169 Fax : 886-3-3246167

Associated companies :

- (1) FORTUNE TASK RESISTOR FACTORY (China – Dongguan)
Tel : 86-769-8339-4790~3 Fax : 86-769-8339-4794
- (2) TA-I TECHNOLOGY (DONGGUAN) CO., LTD. (China –Dongguan)
Tel : 86-769-8339-4790~3 Fax : 86-769-8339-4794
- (3) TA-I TECHNOLOGY (SU ZHOU) CO., LTD. (China – Su Zhou)
Tel :86- 512-63457879 Fax : 86-512-63457869
- (4) TAI OHM ELECTRONICS (M) SDN. BHD. (Malaysia – Penang)
Tel :604- 3900480 Fax : 604-3901481
- (5) P.T.TAI ELECTRONICS Indonesia (Indonesia – Jakarta)
Tel :62-21-89830123 Fax : 62-21-89830703